










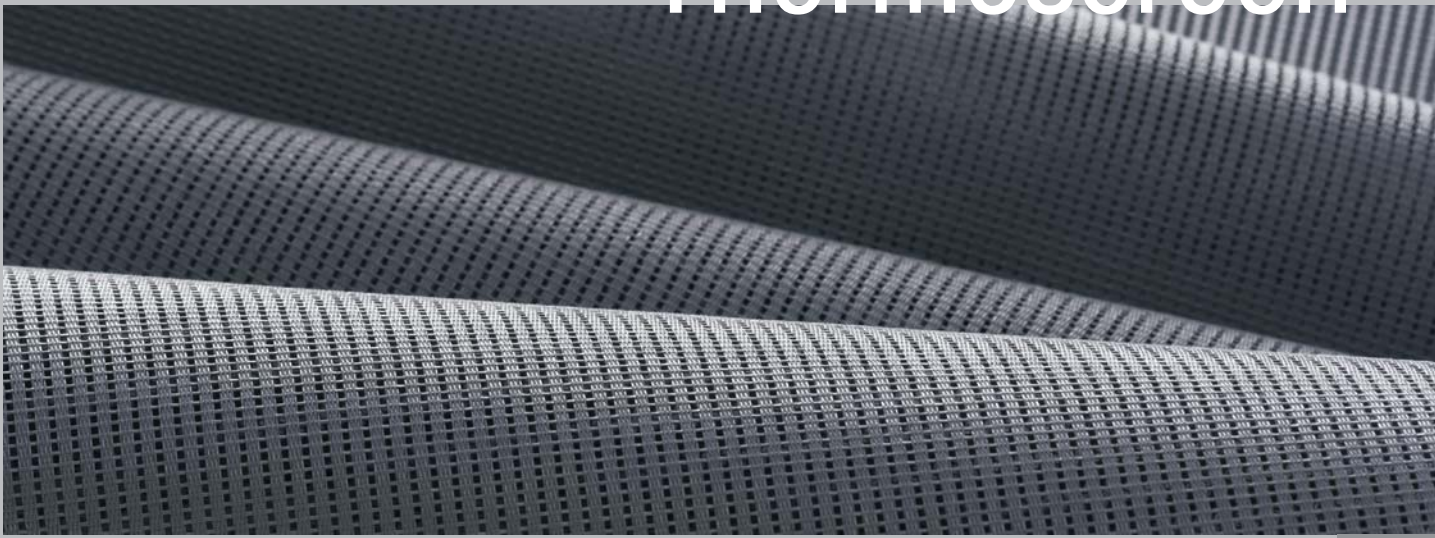

Thermoscreen



Thermoscreen


Composition	DIN 60 001		Woven vinyl coated glass fibre
Fabric weight (g/m ²)	DIN EN 12127		288 - 298
Fabric thickness (mm)	DIN ISO 2286-3		0.4
Fabric width (cm)			214
Flame retardant			Type B (BS 5867) only colour White and Antique White
Applicable in humid areas			Yes
Washing instructions			


Solar and optical coefficients (ASHRAE) All coefficients may have a tolerance of +/- 5%.

Colour	Antique White	Charcoal	Bronze	Silver Grey	White
	32	29	27	24	31
	37	25	26	22	36
	47	6	14	16	50
	16	69	60	62	14

 Visible light transmission (%)


 Solar reflectance (%)

 Solar transmission (%)


 Solar absorption (%)



Antique White

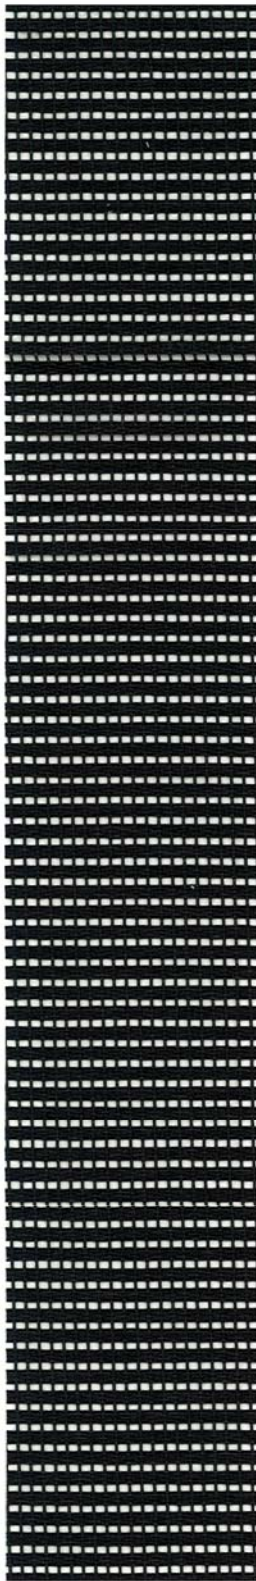

Charcoal

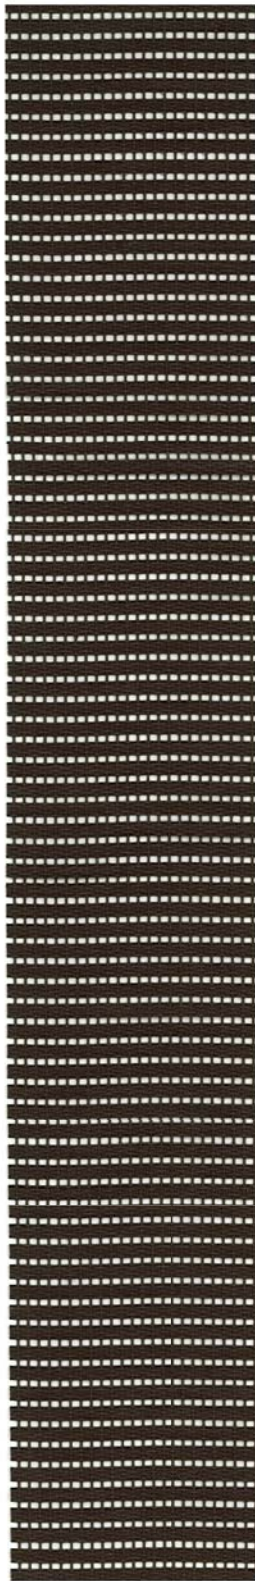

Bronze



Silver Grey



White