








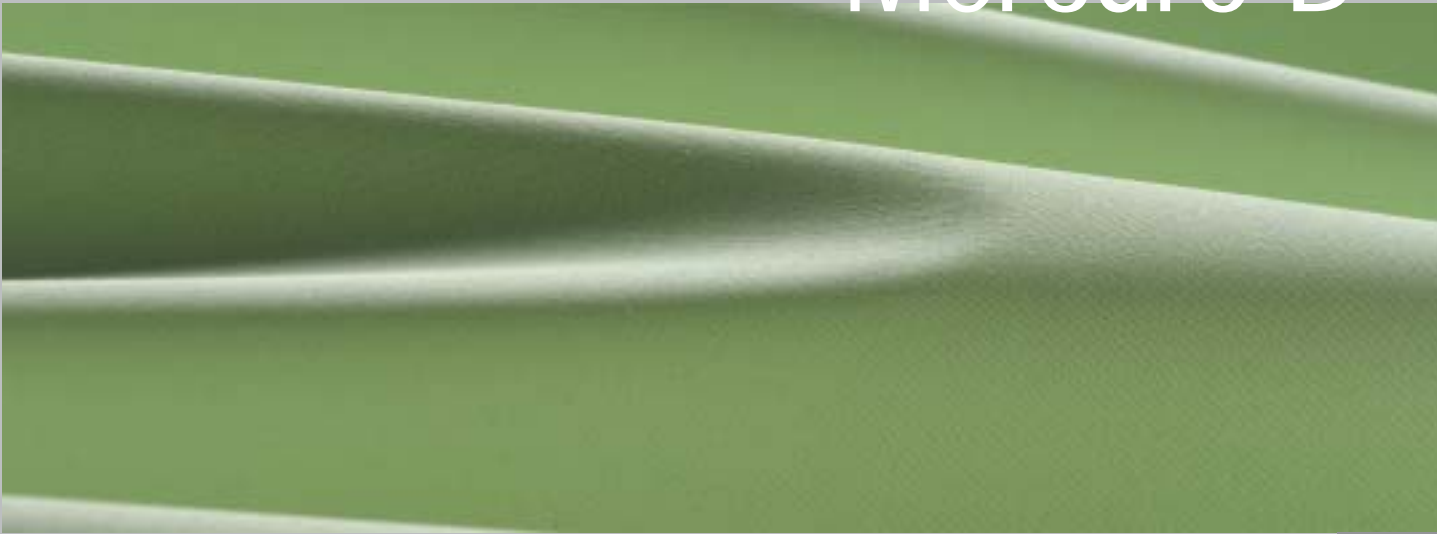

Mercurio B



Mercuro B

Composition	DIN 60 001		100% Polyester
Fabric weight (g/m ²)	DIN EN 12127		340
Fabric thickness (mm)	DIN ISO 2286-3		0.38
Fabric width (cm)			235
Louvre width (mm)			89, 127
Eco-tex Standard 100	96.0.7963 FI Hohenstein		Yes
Flame retardant			B1 (DIN 4102), M1 (NF P 92501-7)
Colour fastness	DIN ISO 105-B02		5-6
Washing instructions			

Solar and optical coefficients (DIN EN 410) All coefficients may have a tolerance of +/- 5%.

Colour	01	04	07	08	09	10	11	13	14	16	19	28
T_v	0	0	0	0	0	0	0	0	0	0	0	0
R_v	79	83	84	83	82	85	82	84	83	79	81	82
A_v	21	17	16	17	18	15	18	16	17	21	19	18
T_s	0	0	0	0	0	0	0	0	0	0	0	0
R_s	66	71	72	70	69	71	71	72	71	67	70	69
A_s	34	29	28	30	31	29	29	28	29	33	30	31
UV	0	0	0	0	0	0	0	0	0	0	0	0
g_{tot}	0.36	0.33	0.33	0.34	0.34	0.34	0.34	0.33	0.34	0.35	0.34	0.34

T_v Visible light transmission (%)

R_v Visible light reflectance (%)

A_v Visible light absorption (%)

UV UV transmission (%)

T_s Solar transmission (%)

R_s Solar reflectance (%)

A_s Solar absorption (%)

g_{tot} Total g-value (Glass g-value: 0,72; 1,6 W/m² K) DIN EN 13363-1



28



14



16



13



01



19



10



11



04



07



08



09